


### Description:

CH005 has 4 fiber cable in-out round ports for the cable diameter  $\Phi 7\text{-}\Phi 18\text{mm}$  entry. It is widely applied to the splicing and distributing variable optical cables. It is made of high-quality ABS plastic and with the mechanical seal structure filled with the seal material. The external component and fastening piece are all made of the high-quality steel. It can be opened after sealing and can be reused without changing sealing material, with silicone rubber insulation tape.

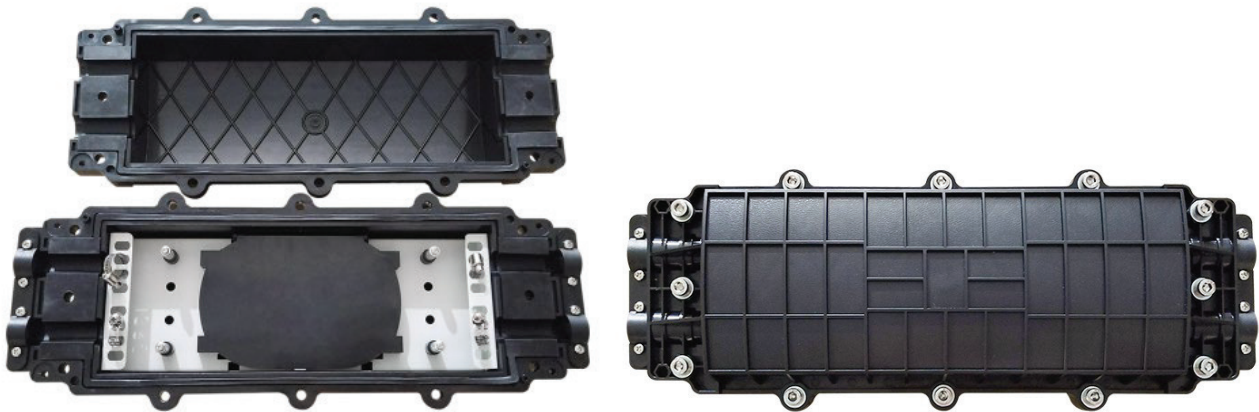

**Application:** Aerial -hanged, Wall-mounting

### Specification:

Dimension (mm)	466.5x179.8x120.6
Weight ( Kg)	About 2.7
Cable diameter	$\Phi 7\text{-}\Phi 18\text{mm}$
cable entry ports	2 in 2 out
Max Capacity of splice tray	6pcs
Max Capacity	72 (single layer tube) 144 (double layer tube)
Sealing structure	silicon gum material or sticky cincture

### Accessories:

- Splice protector sleeve
- Silicon gum material
- Sticky cincture
- Cable ties
- Sealing washer
- Allen wrench
- Insulated rubber belt

