


### Features

- Simple pushing motion to engage tool
- Audible CLICK to alert the operator when tools is fully engaged
- Over 800+ engagements per unit
- Dry cleaning strand eliminates the needs for solvents to be effective
- Crush resistant to over 250N
- Impact resistant to survive drops over 1.5M
- Cleans LC/MU (APC/UPC) and other 1.5mm

- Simple pushing motion to engage tool
- Audible CLICK to alert the operator when tools is fully engaged
- Over 800+ engagements per unit
- Dry cleaning strand eliminates the needs for solvents to be effective
- Crush resistant to over 250N
- Impact resistant to survive drops over 1.5M
- Cleans SC/ST/FCE2000 (APC/UPC) and other 2.5mm

### Male connector



LC



SC




FC




ST

### Female connector



LC



SC









FC



ST

### Cleaning effect

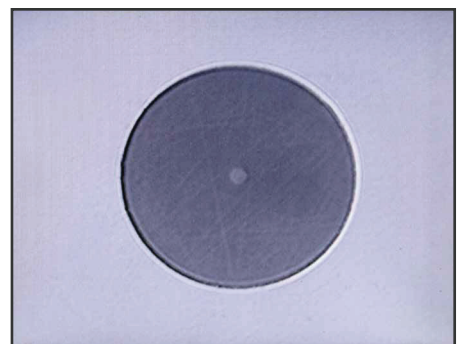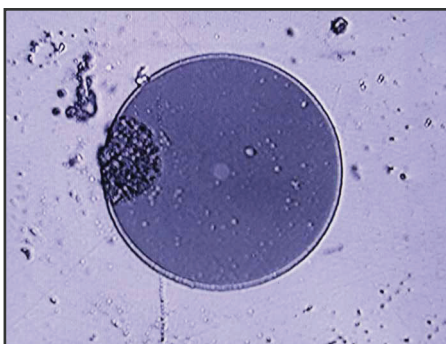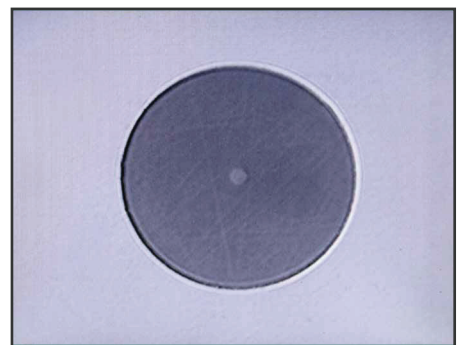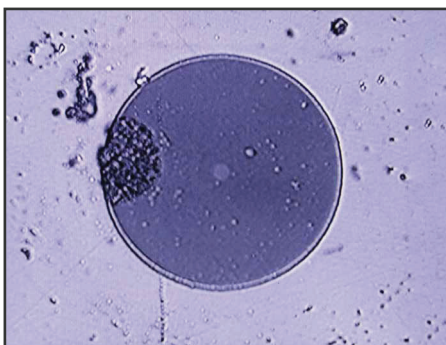

## Product parameter

Name	Optical Connector One-Click Cleaner	Product feature	Economic and efficient
Brand		Range of application	MU/LC(APC & UPC)
Size	18mm*18mm*22mm	Cleaning time	>800

Name	Optical Connector One-Click Cleaner	Product feature	Economic and efficient
Brand		Range of application	SC/FC/ST/E2000(APC & UPC)
Size	18mm*18mm*22mm	Cleaning time	>800

## Product list



An ISO 9001-2015 Company

©2023 CABCOMM System. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CABCOMM. All specifications are subject to change without notice.